
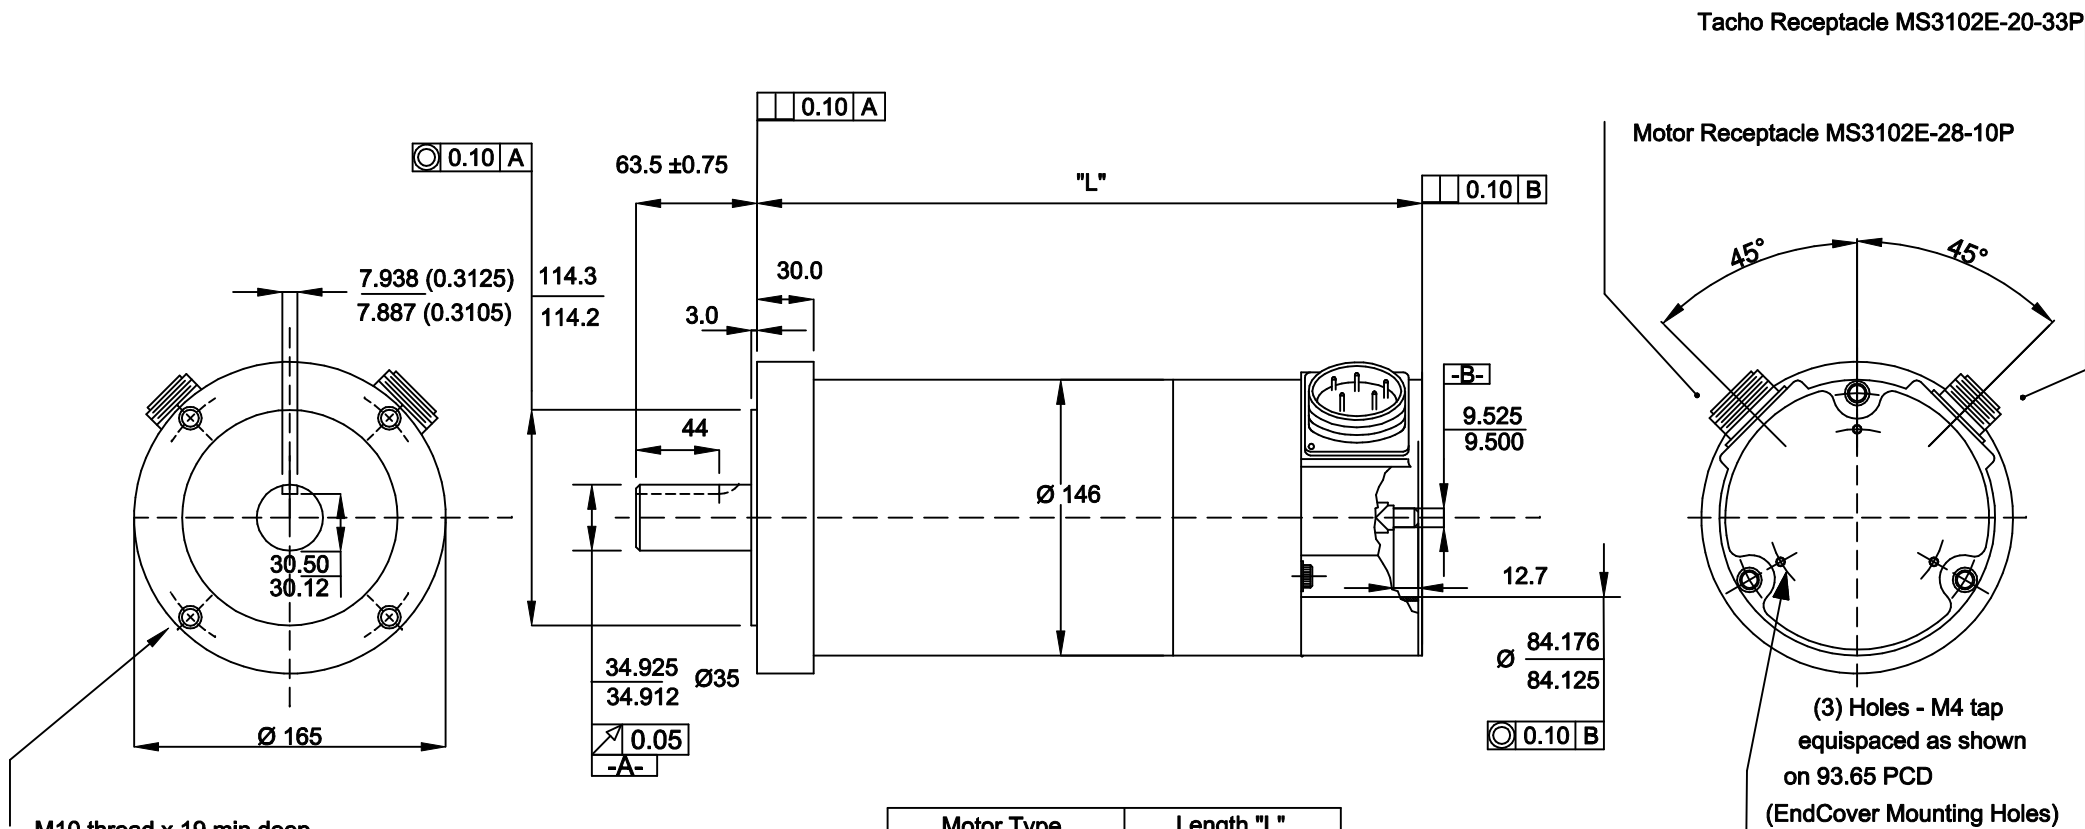




Motor Type	Length "L"
M4-4203	297
M4-4204	322
M4-4205	347
M4-4206	373
M4-4207	398
M4-4208	424
M4-4209	449

- Notes:-
1. With a positive current applied to pin C with respect to pin D, rotation shall be clockwise facing mounting end of motor. With this rotation a positive voltage shall be generated on pin J of tach with respect to pin K.
 2. Motor can be mounted in any position
 3. Thermostat set to open at 90°C $\pm$ 6°C & close at 70° $\pm$ 6°C falling. N.C. contacts rated to 3.0 Amps, 250V. AC., (2) Yellow leads
 4. All dimensions in mm.

					Tolerances. X.XX = ± 0.015 X.XXX= ± 0.005 Ang. Dim. = ± 1°				Scale :				Weight :	
									NTS					
									Material :					
									SEE NOTES					
									Remove all burrs and sharp corners					
						Date	Name		Motor Outline M4-420x -00011-000					
					Drawn	25/11/05	POB							
					App'd									
Issue	ECO. No.	Date	Name	App'd	Norm				M4-420x - 00011 - 000					
Callan Technology Ltd.														
									M4-420x - 00011 - 000					
									Sheet 1 of 1					