
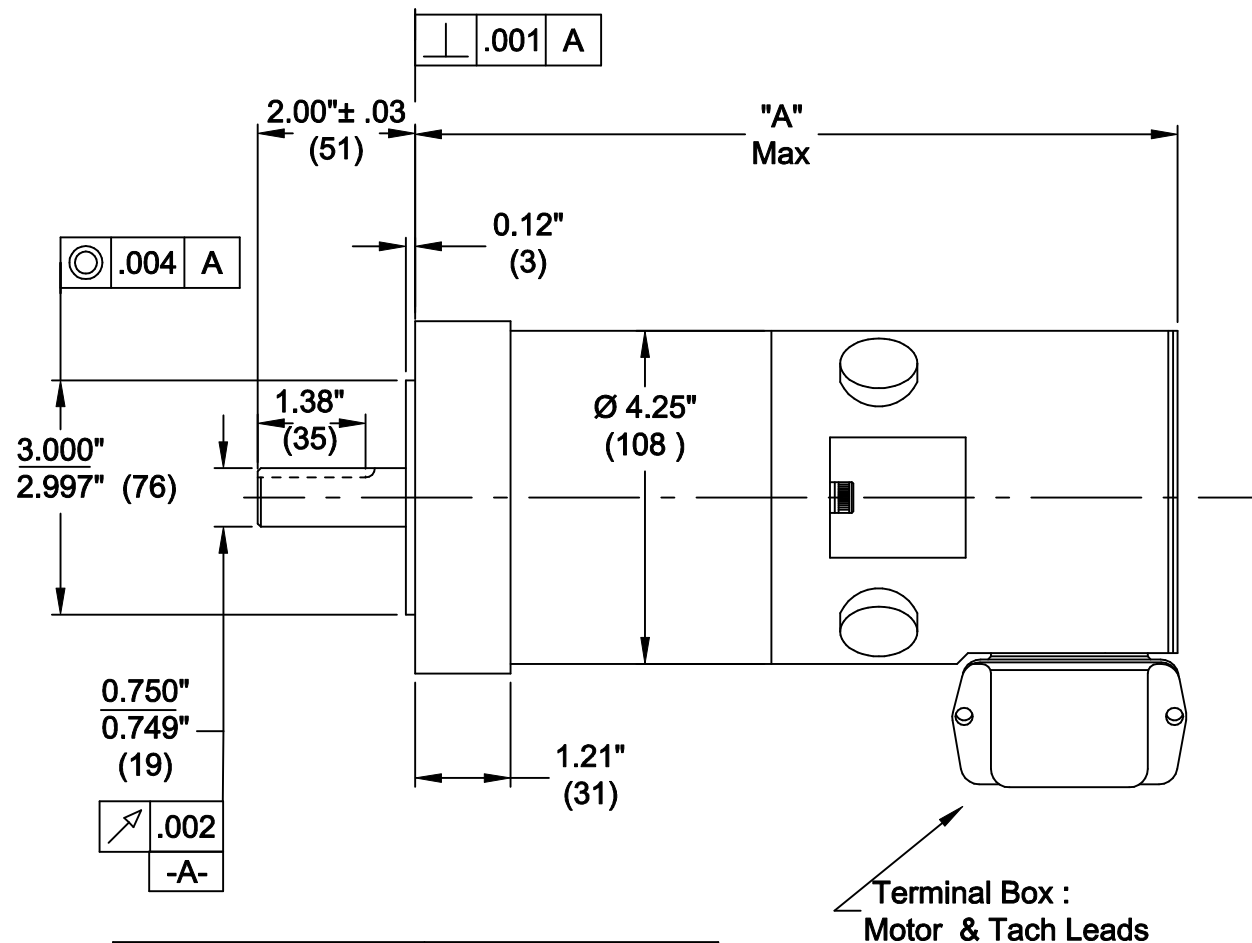


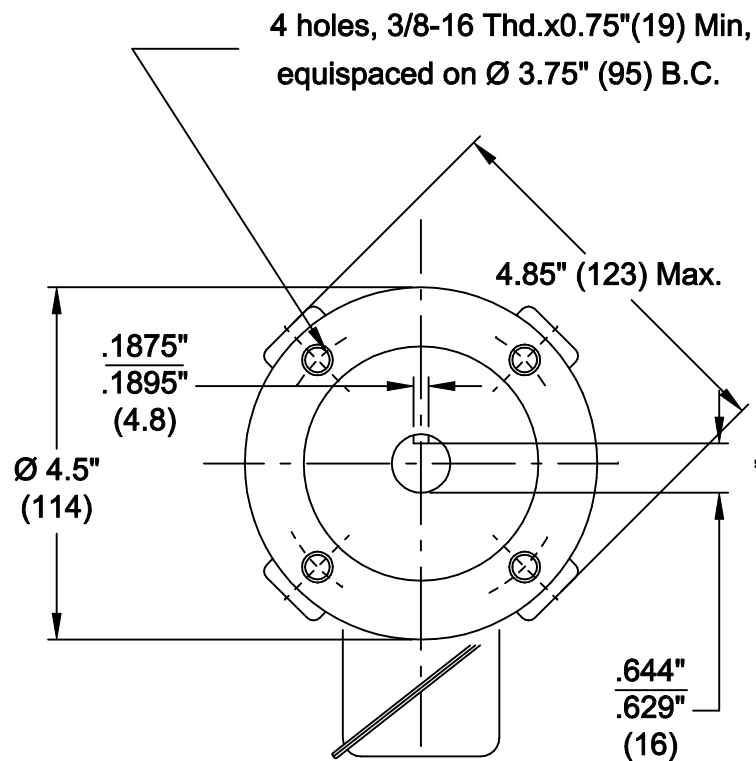

NOTES:-

1. With a positive current applied to green (x2) lead with respect to orange (x2) lead, rotation shall be clockwise, facing mounting end of motor.
(with this rotation, a positive voltage shall be generated on black lead with respect to white lead of tach)
2. Motor may be mounted in any position.
3. All dimensions in inches with metric equivalent in ()

Model No.	"A" Max
TT 2950-1010	8.25 (210)
TT 2952-1010	9.70 (246)
TT 2953-1010	12.60 (320)
TT 2954-1010	14.05 (357)

				Tolerances: XXX = ±0.015" XXXX = ±0.006" Ang. Dim. = ±1°		Surface: 6.3		Scale :		Material:	
				Date: 29/3/05		Name: POB		Remove all burrs and sharp corners.			
				Drawn:		App'd:		DC SERVOMOTOR TT 295X-1010			
				Issue		C.N.C.O. No.		Date:		Name	
				1							
				CALLAN TECHNOLOGY						TT 295x-1010	
				Repl.Fc:		Repl.Bj:				Sheet 1 Of 1	