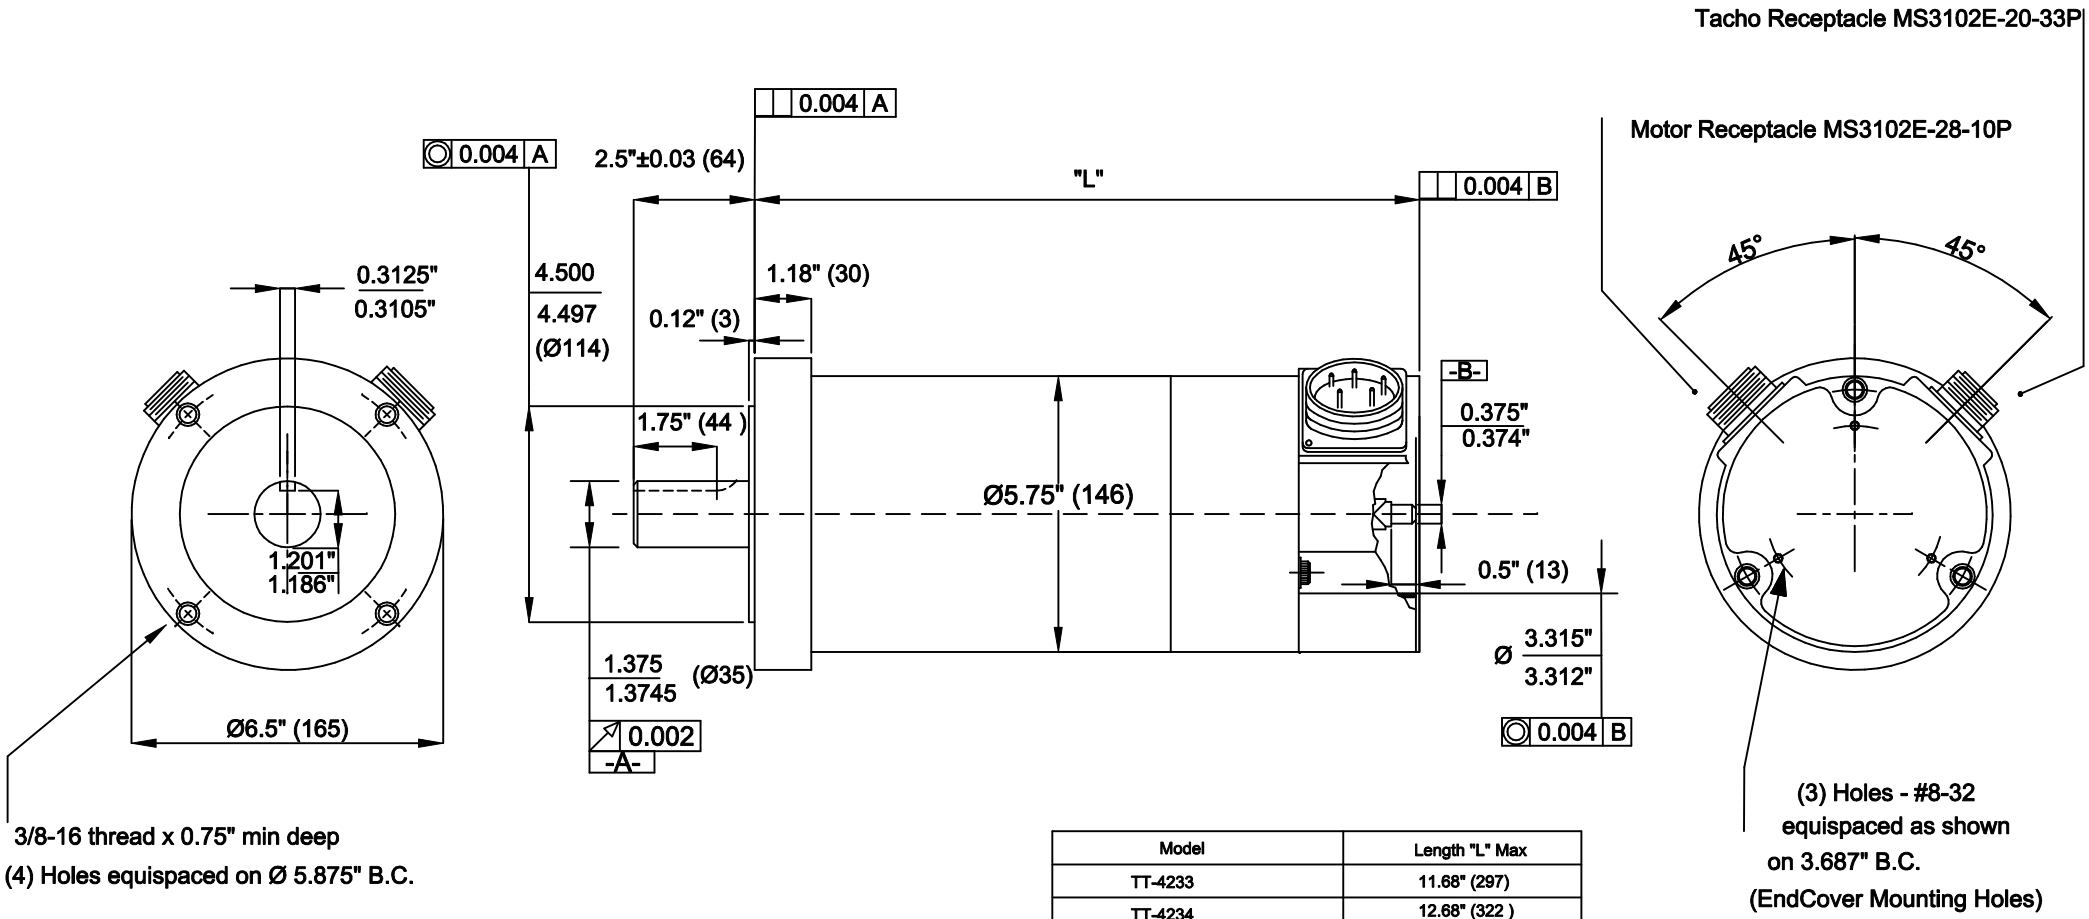

Model	Length "L" Max
TT-4233	11.68" (297)
TT-4234	12.68" (322)
TT-4235	13.68" (347)
TT-4236	14.68" (373)
TT-4237	15.68" (398)
TT-4238	16.68" (424)
TT-4239	17.68" (449)

Notes:-

1. With a positive current applied to pin C with respect to pin D, rotation shall be clockwise facing mounting end of motor. With this rotation a positive voltage shall be generated on pin J of tach with respect to pin K.

2. Motor can be mounted in any position

3. Thermostat set to open at 90°C ± 6°C & close at 70° ± 6°C falling. N.C. contacts rated to 3.0 Amps, 250V. AC., pins A & F

4. All dimensions in inches with mm in ( ).

Issue	ECO. No.	Date	Name	App'd

Tolerances.
X.XX = ± 0.015
X.XXX= ± 0.005
Ang. Dim. = ± 1°

	Date	Name
Drawn	25/11/05	POB
App'd		
Norm		

Scale : NTS

Weight :

Material : SEE NOTES

Remove all burrs and sharp corners

Motor Outline

TT 423X-1011

Callan Technology Ltd.

TT 423X-1011

Sheet 1 of 1